


TIGER Neo

66QL6-BDV

650-670 Watt (Preliminary)

BIFACIAL MODULE WITH DUAL GLASS

N-type

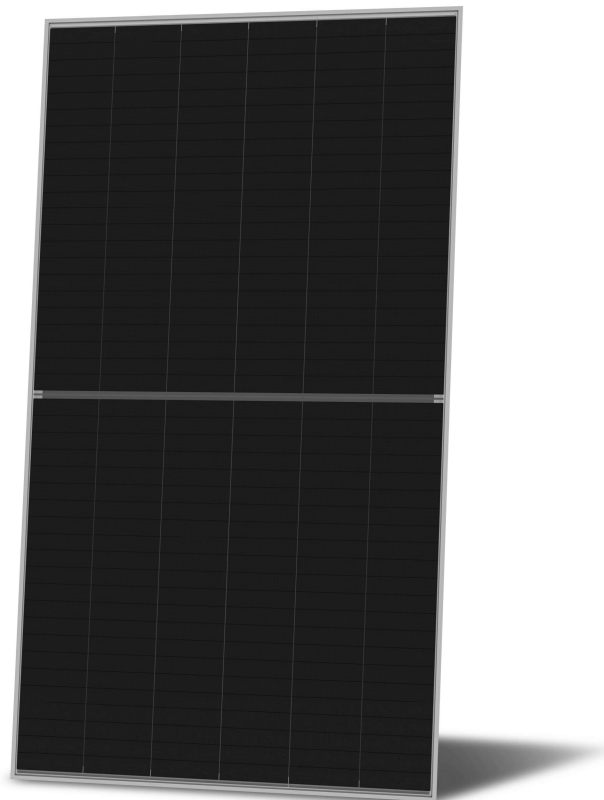


N-type Technology

N-type modules with Tunnel Oxide Passivating Contacts (TOPCon) technology offer lower LID/LeTID degradation and better low light performance.



Tiger Neo 3.0 Serie

Brand new JinkoSolar's Tiger Neo 3.0 series (Quarter Cells) offer better reliability and efficiency.

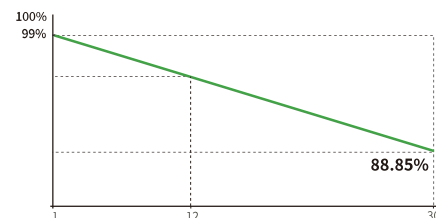

12 Year
Product Warranty

30 Year
Linear Power
Warranty

1%
First-year
Degradation

0.35%
Annual Degradation
Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™
Continuous Quality Assurance



Dual-Sided Power Generation

Dual-sided power generation gain increases with backside exposure to light, significantly reducing LCOE.



Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Anti-PID Guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

JKM650-670N-66QL6-BDV-Preliminary

66QL6-BDV 650-670 Watt (Preliminary)

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	264 (66×4)
Dimensions	2382×1134×30 mm
Weight	32.4 kg
Front Glass	2.0 mm, Anti-reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M / JK03M2 / Others*
Output Cables (Including Connector)	4.0 mm ² (+): 400 mm , (-): 200 mm or Customized Length

* MC4 and MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	2396×1110×1251 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallets, 72 pcs/stack, 720 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power - Pmax [Wp]	650	655	660	665	670
Maximum Power Voltage - Vmp [V]	42.57	42.70	42.83	42.96	43.09
Maximum Power Current - Imp [A]	15.27	15.34	15.41	15.48	15.55
Open-circuit Voltage - Voc [V]	50.26	50.44	50.62	50.80	50.98
Short-circuit Current - Isc [A]	15.98	16.04	16.10	16.16	16.22
Module Efficiency STC [%]	24.06	24.25	24.43	24.62	24.80
Power Tolerance	0 ~ + 3 %				
Temperature Coefficient of Pmax	-0.26 %/°C				
Temperature Coefficient of Voc	-0.21 %/°C				
Temperature Coefficient of Isc	0.034 %/°C				

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)


Maximum Power - Pmax [Wp]	724	729	735	741	746
Maximum Power Voltage - Vmp [V]	42.52	42.69	42.86	43.03	43.20
Maximum Power Current - Imp [A]	17.04	17.10	17.17	17.23	17.30
Open-circuit Voltage - Voc [V]	50.38	50.56	50.74	50.92	51.10
Short-circuit Current - Isc [A]	17.80	17.87	17.94	18.00	18.07

BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25°C, AM=1.5

Application Conditions

Operating Temperature	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35 A
Bifaciality Coefficients	φVoc: 98±5 %, φIsc: 85±5 %, φPmax: 85±5 %


Engineering Drawings

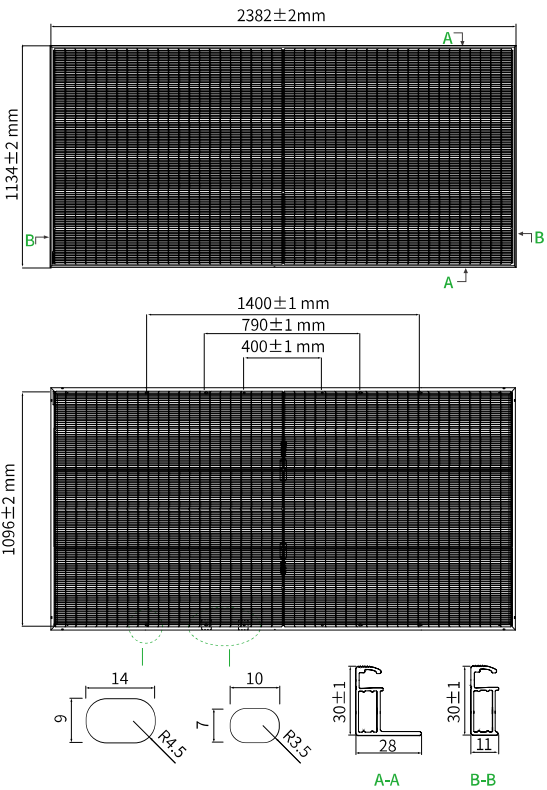

Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

Power-Voltage Curves (66QL6-BDV 660W)

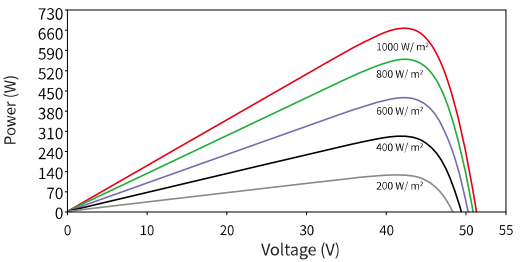

Current-Voltage Curves (66QL6-BDV 660W)

